WALL/KILN SPACING: 12" [30.5cm] SPACING BETWEEN SIDES OF KILN AND WALLS OR OTHER OBJECTS. 18" [45.7cm] IS RECOMMENDED. LEAVE AT LEAST 18" [45.7cm] BETWEEN TWO KILNS.

AMBIENT VENTILATION: SEE CHART BELOW FOR RATINGS. TO CALCULATE

REQUIREMENTS, SEE hotkilns.com/calculate-kiln-room-ventilation.

KILN VENTILATION: L&L VENT-SURE KILN VENT RECOMMENDED FOR SAFETY


AND LONGER ELEMENT LIFE. OPTIONAL CONTROL ALLOWS VENT TO BE TURNED ON AND OFF WITH CONTROL.


OTHER INFO: REFER TO INSTALLATION INSTRUCTIONS AND CAUTIONS INSTRUCTIONS FOR OTHER REQUIREMENTS AND SAFETY INFORMATION. REFER TO WIRING DIAGRAM FOR ELECTRICAL HOOKUP INFORMATION.

MAX LOAD WEIGHT: SEE hotkilns.com/load-weight

WEIGHT OF KILN: 1940 LBS, 880 KG



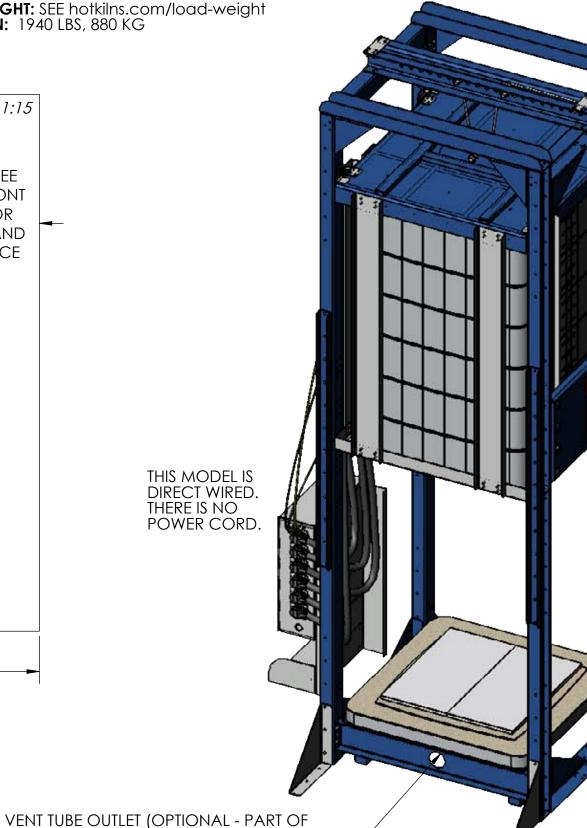

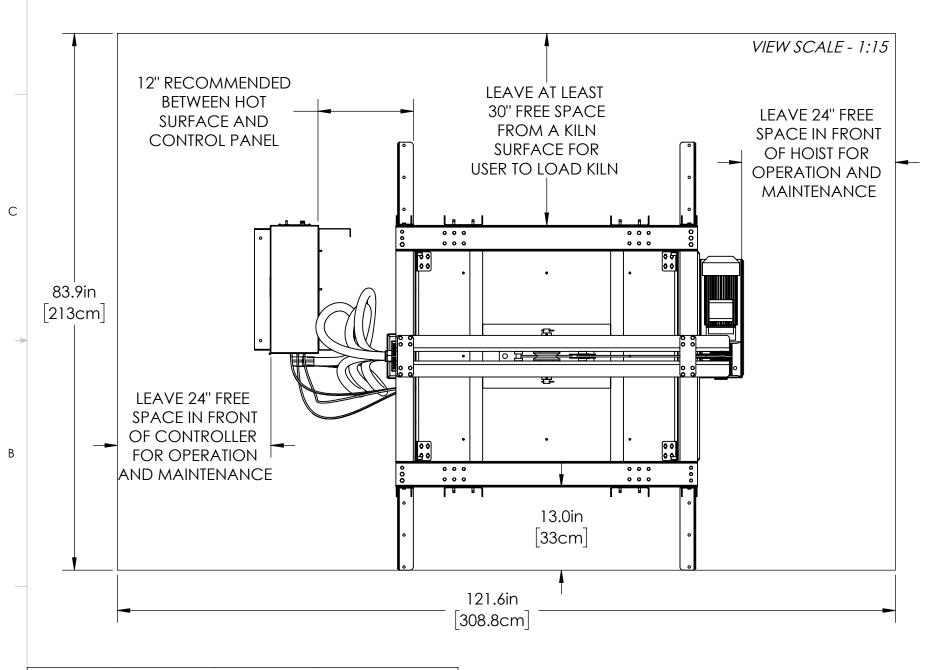

BTUS/ KILOJOULES PER HOUR NEEDED TO BE VENTED WITH AMBIENT ROOM VENTILATION (THIS IS IN ADDITION TO KILN VENTING):

AT TEMP F	BTUS	AT TEMP C	KILOJOULES
1800F	34346	980C	36237
2000F	40404	1095C	42628
2232F	48043	1222C	50688
2350F	52180	1285C	55053

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L&L KILN MFG INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF L&L KILN MFG INC. IS PROHIBITED. MADE FROM NEW

DSL 05/01/20 1:18

5

X3254-BL (3" BRICK) DAVINCI BELL-LIFT GENERAL DIMENSIONS

VENT-SURE DOWNDRAFT VENT SYSTEM)-

3

THERE IS NO

LIKINS SWEDESBORD NJ 08085 REV SHEET OF DRAWING NO. 1/4 | 300-001-46

