



L&L Kiln Mfg. Inc. • 505 Sharptown Rd. • Swedesboro, NJ 08085
Phone: 856.294.0077 • Fax: 856.294.0070 • Email: sales@hotkilns.com • Web: hotkilns.com

USING THE VENT-SURE ON OTHER KILNS

APPLICATION

The Vent-Sure Kiln vent can be used on other kilns. Basically all you need, in addition to the Vent-Sure kiln vent system, is one of our three standard kiln stands. We make these for 18", 23" and 29" diameter polygonal kilns. The Vent-Sure will vent any kiln up to 20 cubic feet (and more depending on the fumes being generated). Because of our bypass valve you can adjust the Vent-Sure for any smaller size kiln. Although the Vent-Sure is c-UL-us listed for use with all L&L Jupiter and DaVinci kilns, UL will not list it for any kiln that they did not specifically test it with.

PRICES

Vent-Sure kiln vent System (M-V--VENT/00)\$440


Includes wall mount blower with 120 volt cord and cord mounted on/off switch, 90 elbow for mounting to the duct that sticks out of the wall, 15 feet of aluminum flexible duct, the bypass collection box that mounts to the bottom of one of the stands.

If you order our vent for another kiln we will give you a 50% discount off any of our stands. Note that our stands have a full sheet of galvanized steel to support the bottom of your kiln. This is strengthened by edges with two bends each. The semi-shiny galvanized surface helps reflect radiant heat back into the kiln.

They can ship by UPS or FedEx.

INSTRUCTIONS

You can download the vent instructions before you buy at hotkilns.com/vent-instruct.pdf

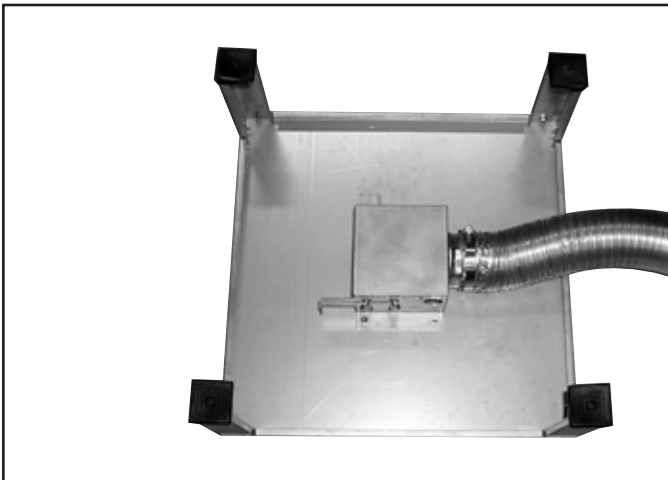

This shows a typical L&L Jupiter stand with the vent collection bypass box mounted to the bottom of the stand. These stands are superior to many of the stands used in the kiln industry. They are made of 14 gauge galvanized steel (similar to galvanized but with a smoother finish). The double bend on the edges stiffens the stand to make it very strong. The top itself provide almost full support of the kiln bottom. The four legs, which also feature multiple bends, bolt onto the stand top. Plastic molded feet are included to provide a smooth surface against your floor. The Bypass Collection Box bolts onto the stand in the middle on four studs that are welded to the stand top.